

# Talco Fire Systems

Residential & Commercial Packaged Fire Pump Specialists

Portland, Oregon

## ULR-150

w/Test Port, City By-Pass, Jockey Pump  
Listed Fire Pump & Controller  
NFPA-20 Compliant Packaged System

Controller: \_\_\_\_\_

Jockey Pump: \_\_\_\_\_


Jockey Controller: \_\_\_\_\_

Suction x Discharge: 3" x 3" Grooved Fittings

## 150GPM

3 x 3 - 7A


| PSI (range) | Motor HP |
|-------------|----------|
| 41-50       | 7½       |
| 51-60       | 10       |

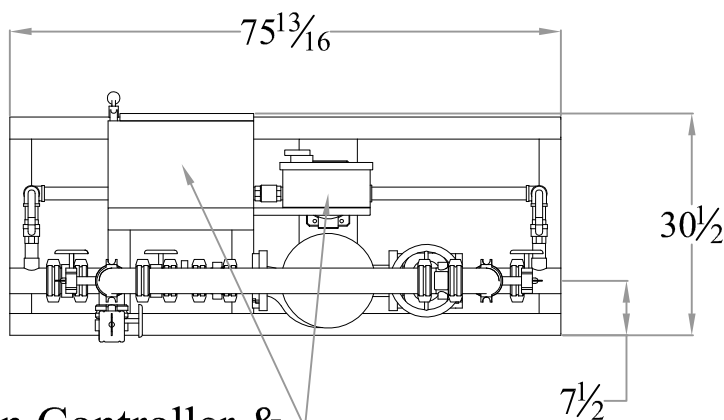

Main Controller &  
Jockey Controller

| DESIGN CONDITIONS            |  |
|------------------------------|--|
| _____ GPM @ _____ PSI        |  |
| _____ HP _____ V _____ Phase |  |

|                   |             |
|-------------------|-------------|
| Project: _____    |             |
| Contractor: _____ |             |
| Date: _____       | P.O.: _____ |

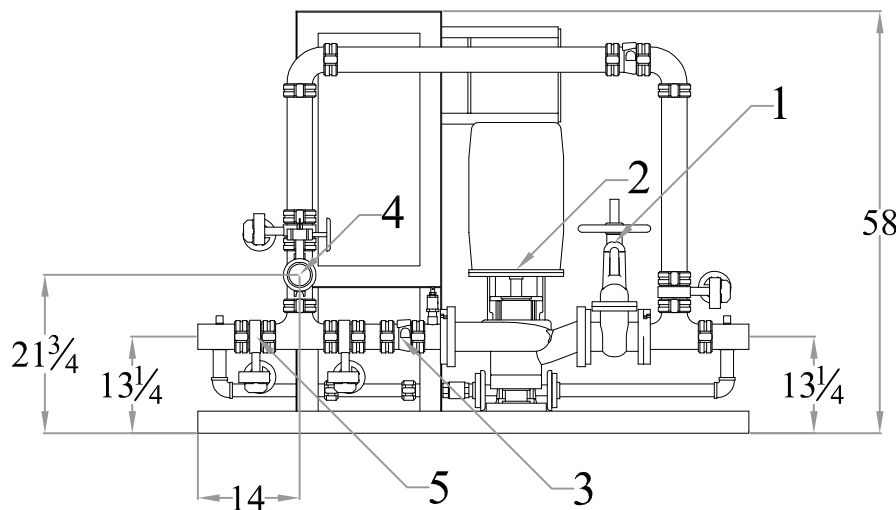

| System Components |                      |
|-------------------|----------------------|
| 1                 | OS&Y Gate Valve      |
| 2                 | Inline Pump & Motor  |
| 3                 | Check Valve          |
| 4                 | Test Port Connection |
| 5                 | Monitored Butterfly  |

Approximate ship weight: < 1000#