

# Talco Fire Systems

Residential & Commercial Packaged Fire Pump Specialists

Portland, Oregon

## ULR-750

w/Test Port, Jockey Pump  
Listed Fire Pump & Controller  
NFPA-20 Compliant Packaged System

Controller: \_\_\_\_\_

Jockey Pump: \_\_\_\_\_


Jockey Controller: \_\_\_\_\_

Suction & Discharge: 6" Grooved Fittings

## 750GPM

4 x 6 - 10B

| PSI<br>(range) | Motor<br>HP |
|----------------|-------------|
| 86-100         | 60          |
| 101-120        | 75          |
| 121-143        | 100         |

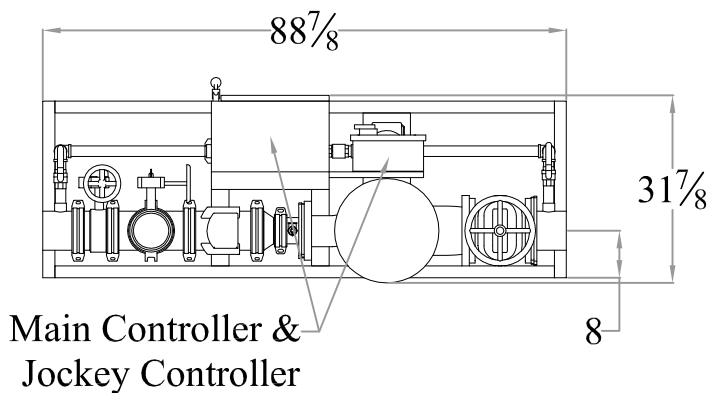

| DESIGN CONDITIONS     |                              |
|-----------------------|------------------------------|
| _____ GPM @ _____ PSI | _____ HP _____ V _____ Phase |

|                   |             |
|-------------------|-------------|
| Project: _____    |             |
| Contractor: _____ |             |
| Date: _____       | P.O.: _____ |

| System Components |                      |
|-------------------|----------------------|
| 1                 | OS&Y Gate Valve      |
| 2                 | Inline Pump & Motor  |
| 3                 | Check Valve          |
| 4                 | Test Port Connection |
| 5                 | Monitored Butterfly  |

Approximate ship weight: < 2550#

